

LIFTO K

ADJUSTABLE PEDESTAL



LIFTO KU pedestals enable simple, fast and precise height adjustment for decking substructures made of wood, wood-like materials and aluminium.

LIFTO KS pedestals enable simple, quick and cost-effective installation of patio slabs made of stone, concrete and ceramic. A joint width of just 3.2mm ensures a visually appealing installation design.

The height adjustment is continuously variable with millimetre precision via an integrated height adjustment ring. Height differences of 50-140mm can be accommodated with the two basic models and extended to 500mm with a simple intermediate adapter.

LIFTO N Slope corrector is compatible with LIFTO KU and KS and automatically levels gradients up to 4% in all directions.

LIFTO R Regulating discs have a shock-absorbing function and compensate for irregularities on the patio tiles.

LIFTO KU 50 - 80 mm	
PU	Prod. No.
10 PCS	015213000
50 PCS	015214001*

LIFTO KU 80 - 140 mm	
PU	Prod. No.
6 PCS	015313000
50 PCS	015315001*



BRANDING
Custom branding upon request
* no branding possible

LIFTO KS 50 - 80 mm	
PU	Prod. No.
10 PCS	015213001
50 PCS	015214002*

LIFTO KS 80 - 140 mm	
PU	Prod. No.
6 PCS	015313001
50 PCS	015315002*

LIFTO R Regulating disc 2.0 mm	
PU	Prod. No.
50 PCS	015804000

LIFTO KA 60 Adapter	
PU	Prod. No.
12 PCS	015412000
126 PCS	015414000*

LIFTO N Slope corrector	
PU	Prod. No.
50 PCS	015913000

LIFTO R Regulating disc 1.3 mm	
PU	Prod. No.
50 PCS	015704000

DOWNLOADS








Data sheet



Tips & Tricks



Video

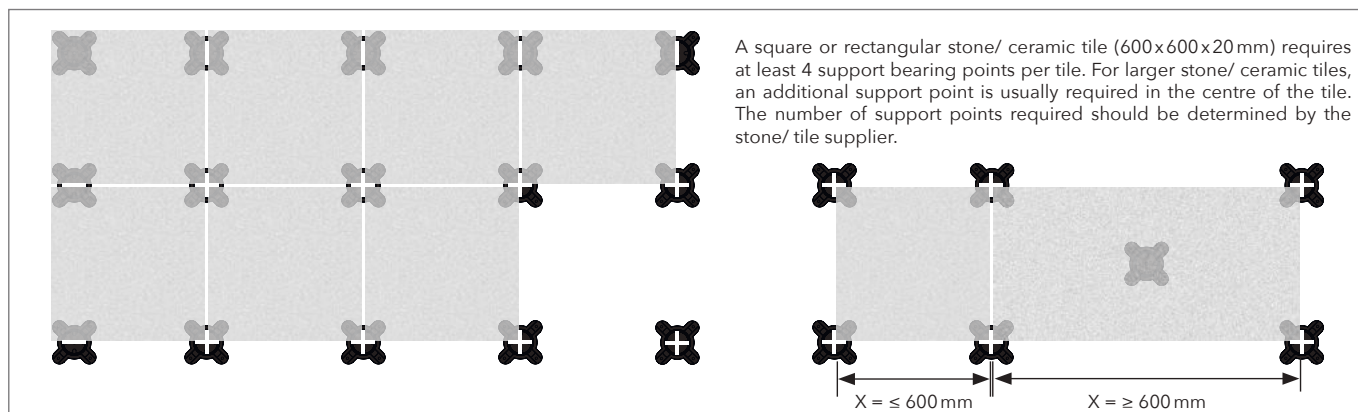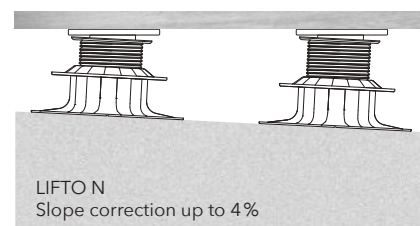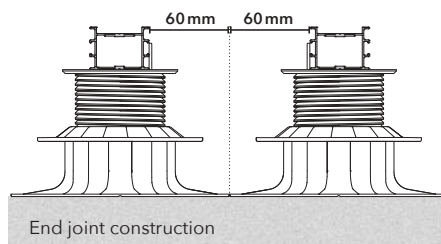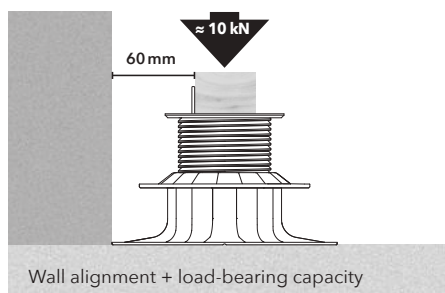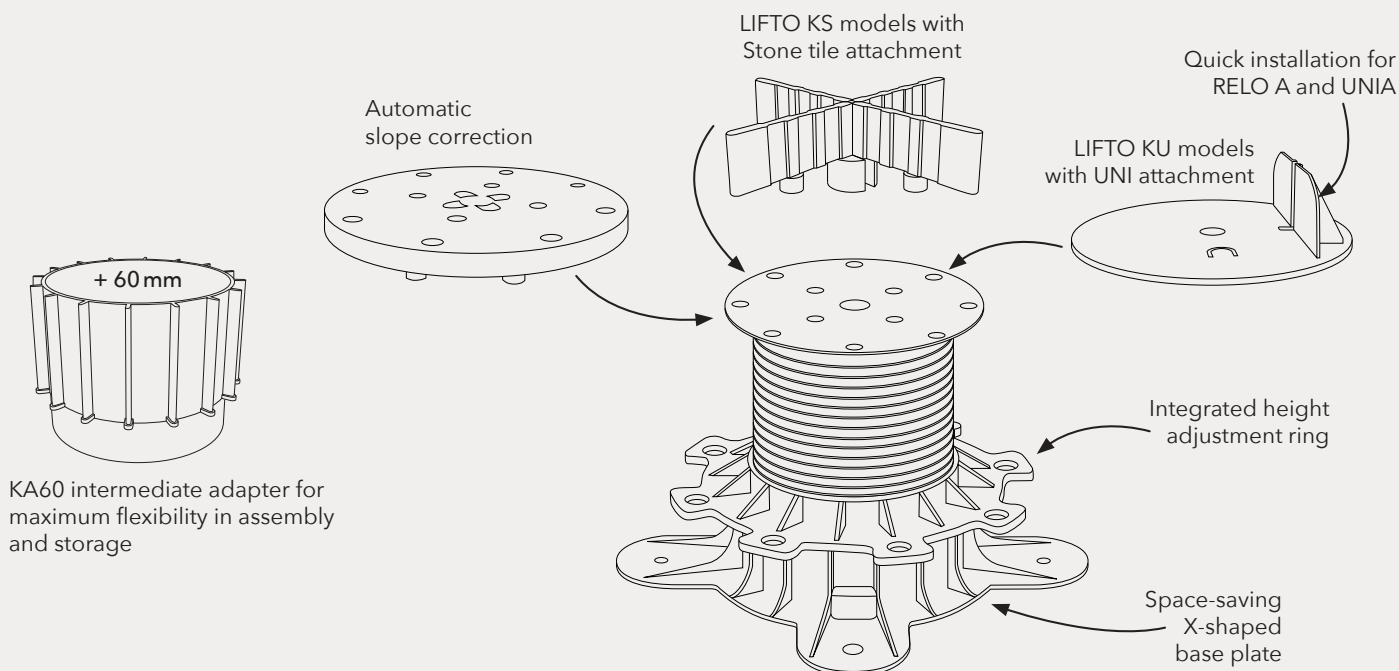

	OVERVIEW	LIFTO KU 50 - 80	LIFTO KU 80 - 140	LIFTO KS 50 - 80	LIFTO KS 80 - 140	Adapter KA 60
Height adjustment	50 - 80 mm	■		■		
	80 - 140 mm		■		■	
	140 - 200 mm		■		■	+1
	200 - 260 mm		■		■	+2
	260 - 320 mm		■		■	+3
	320 - 380 mm		■		■	+4
	380 - 440 mm		■		■	+5
	440 - 500 mm		■		■	+6
	Dimensions:	Baseplate Ø 225 mm 90 mm support plate diameter		Support plate Ø 120 mm Joint cross 3.2 mm		+ 60 mm height
	Material:	PP polypropylene Recycled black UV and weather resistant				
	Accessories:	UNIA1 4.2 x 22 mm for fastening the pedestals to a wooden or aluminium substructure RELO A adapter for screwless fastening of the pedestals to RELO substructure joists GUMO LGD/LGA pressure distribution pad for flat roof / LGA for aluminium foil LIFTO N automatic three-dimensional 4% levelling / installation height + 15 mm LIFTO R regulating disc for stone slabs - thickness 1.2 or 2.0 mm				