


# BASO

## DECKING SPACER

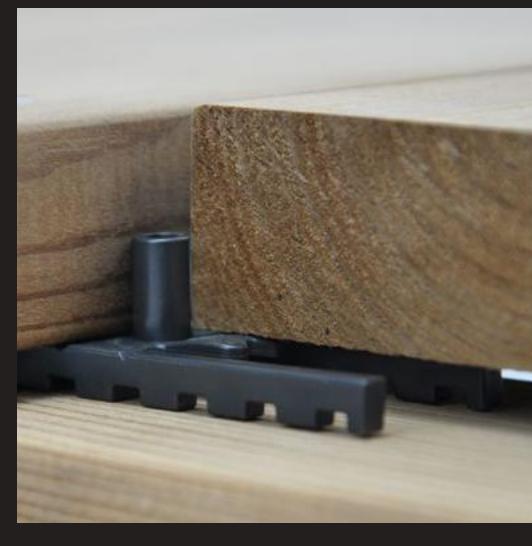

### OVERVIEW

<b>Dimensions:</b>	Length 80 mm   Width 25 mm   Height 6 mm Joint spacer 4 mm Joint spacer 7 mm
<b>Material:</b>	PP Polypropylene Recycled black UV and weather resistant
<b>Fastening type:</b>	Distance spacer for visible screw connections





**BASO** is a spacer that allows ventilation and prevents water and dirt accumulation between the decking and the substructure.

The integrated spring elements contribute to a secure connection, prevent the generation of noise and increase the comfort of walking.

The 6 mm height extension allows screw flexibility thus absorbing the swelling and shrinking effects drastically reducing the risk of shearing.

Specially designed joint spacer guides between the decking boards allow for rapid assembly and absorb swelling movements.

The BASO distance spacer can be modified for the first and last board rows, simply cut along the marked recessed line.

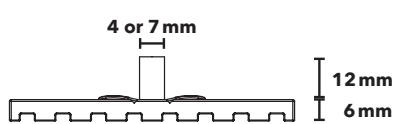

BASO		
Description	PU	Prod. No.
4 mm	100 PCS	016305000
7 mm	100 PCS	016405000

**BRANDING**  
Custom branding  
upon request





Spring elements contribute to a secure connection, prevent noise generation and increase walking comfort


Joint distance spacer ensures uniform spacing during assembly and absorbs decking swelling movements

The 6 mm height provides structural protection to the entire deck structure and protects the screws from shearing

Recess line for simple start and end modification

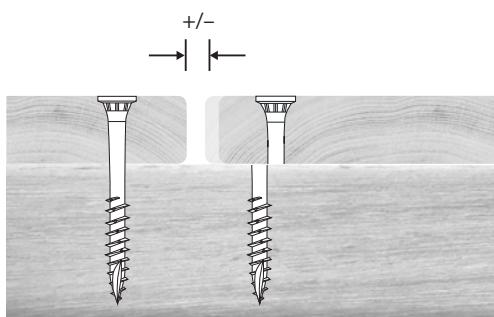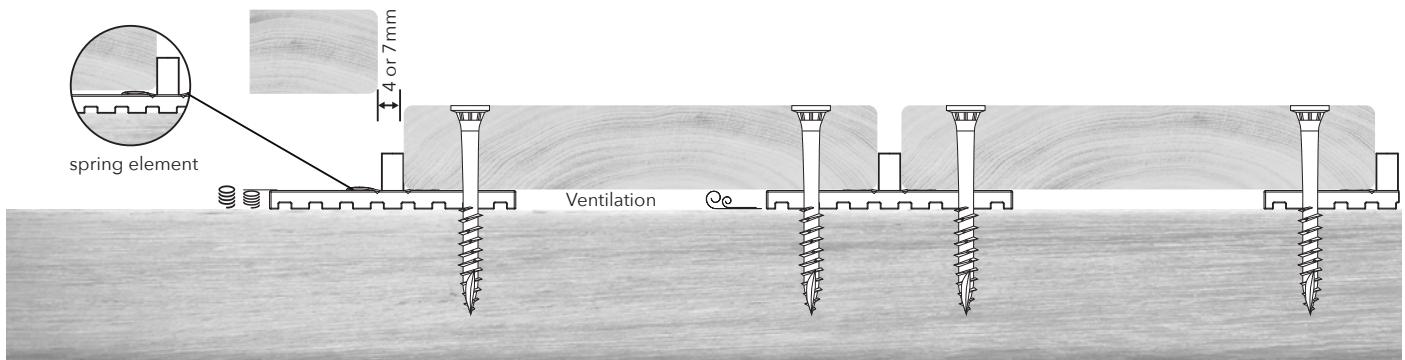

Shearing without BASO X

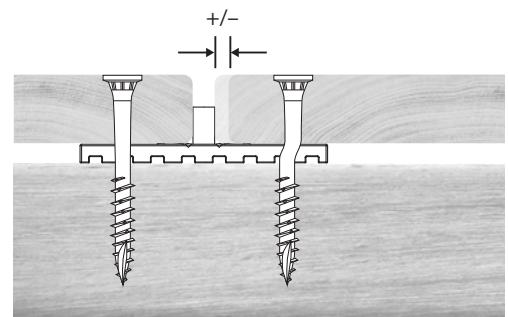

BASO reduces the shear forces by 50% ✓

#### DOWNLOADS



Data sheet



Tips & Tricks



Configurator