


DEKORA

FACADE CONNECTOR

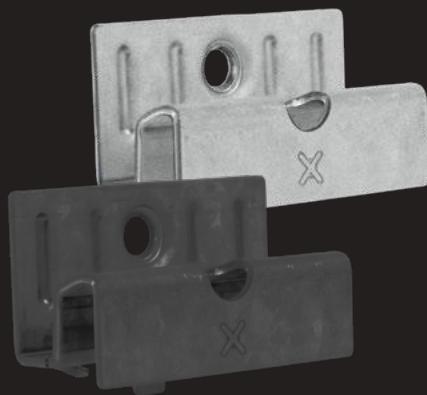

The **DEKORA** Facade Connector ensures simple, fast, and secure installation of closed cladding made of wood or wood-like materials.

The concealed tongue and groove fixing protects the exterior surface from the effects of the weather and ensures optimum structural protection.

The chamfered locating guide facilitates installation and ensures smooth insertion and positioning of the cladding profile into the connector.

The connector compensates natural swelling movements of the cladding without any restrictions – swelling movements are absorbed by the integrated relief zones.

The cladding profiles are securely affixed to the substructure via the cladding connector using the provided system screw.

OVERVIEW	
Material:	Zinc-Magnesium coated sheet metal Zinc-Magnesium coated sheet metal with additional C4 zinc flake coating black System screw ELITA hardened stainless steel
Fire rating:	Assured by metal connectors
Fastening type:	Concealed sliding point fastening
Façade profile:	Specific DEKORA profile



DEKORA		
Description	PU	Prod. No.
Zinc-Magnesium	100 PCS	015005000
Zinc-Magnesium C4 black	100 PCS	015105000

SET-PACK
Each package contains the
ELITA1 4.5 x 34mm system screws
required for installation and
assembly instructions




BRANDING
Custom branding
upon request



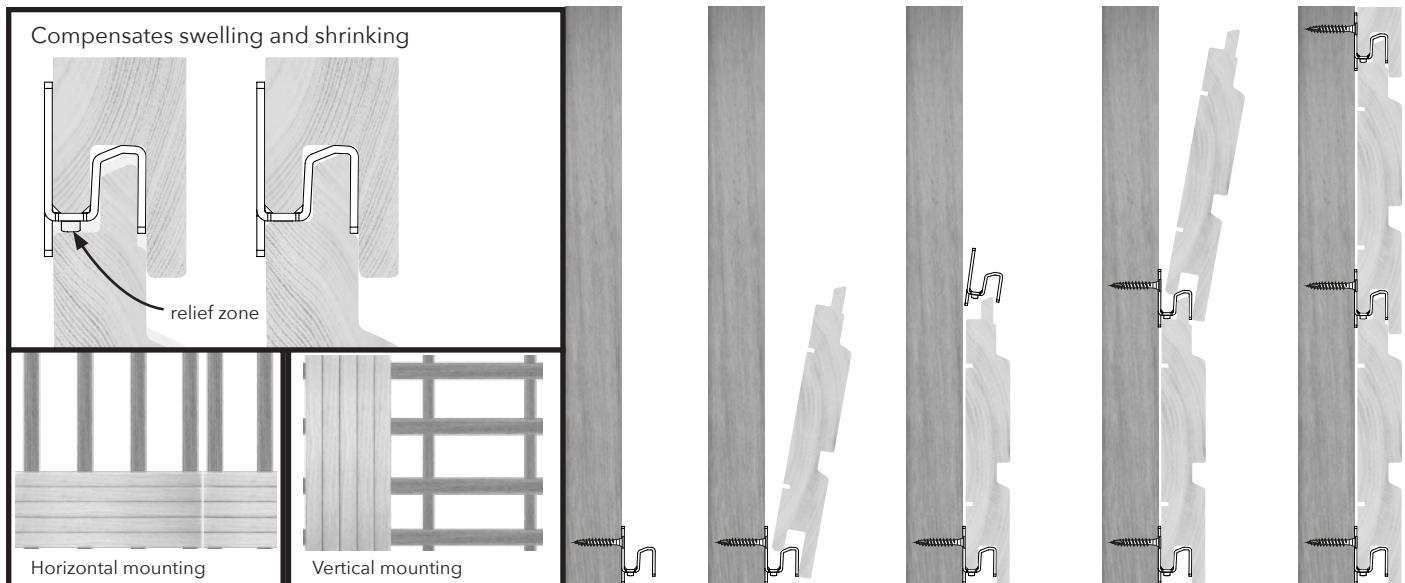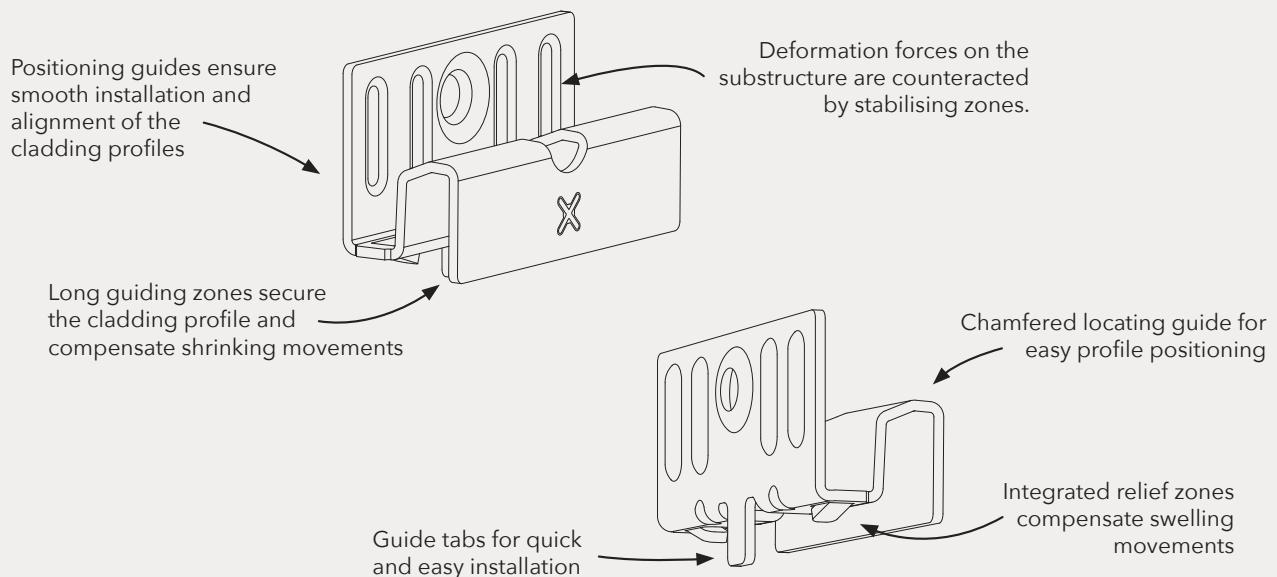

DEKORA-Profile

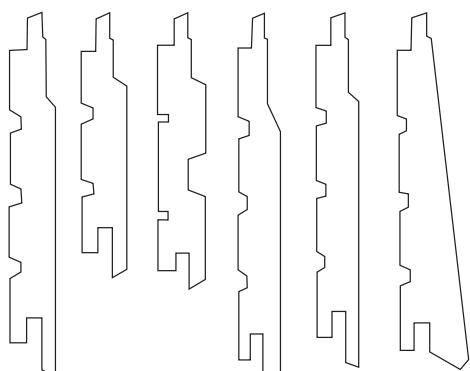

Maximum design flexibility.

DEKORA cladding profiles can be produced in a wide range of dimensions, wood species and surface finishes.

Local building regulations must be followed.

DOWNLOADS



Installation



Board exchange



Data sheet



Tips & Tricks



Video