

# TENI

## DECKING CONNECTOR



The **TENI** concealed decking connector provides a very simple, fast, and secure installation for modified, dimensionally stable woods and composite decking with concave side grooves.

The fastening system is distinguished by two independent engagement arms, the rigid side secures the board in place and the other absorbs any swelling and shrinking movements.

The dynamic and permanently flexible sliding point is automatically positioned by the angled screw connection to the substructure. Natural dimensional changes of each board are compensated by the pre-tensioning forces. Swelling is not transferred to adjacent boards - each board works independently - no chain reaction across the decking area.

The 8 mm base plate ensures perfect rear ventilation and structural protection of the structural components.

The boards can be replaced quickly and easily if required, due to the integrated pop-out feature.

The decking connector can be modified for the first and last board rows. No additional connector is required.

### OVERVIEW

<b>Dimensions:</b>	Length 52 mm   Width 40 mm   Height 8 mm joint spacing 6 mm
<b>Material:</b>	POM polyoxymethylene black UV and weather resistant UNIA System screw hardened stainless steel
<b>Fastening type:</b>	Concealed Sliding point fixation
<b>Decking profile:</b>	Dimensionally stable and modified wood species with decking boards featuring a lateral groove

### TENI

Description	PU	Prod. No.
WOOD incl. System screw 4.2 x 45 mm	<b>80 PCS</b>	016905000
ALU incl. System screw 4.0 x 30 mm	<b>80 PCS</b>	016905001

### RELO T 56 Aluminium substructure

Description	PU	Prod. No.
L 2,000 mm	<b>99 PCS</b>	032800000
L 4,000 mm	<b>99 PCS</b>	032800001




**BRANDING**  
Custom branding  
upon request





### SET-PACK

Each packaging contains the system screws  
required for installation, 1 pc HELPO Bit  
TX20 and assembly instructions





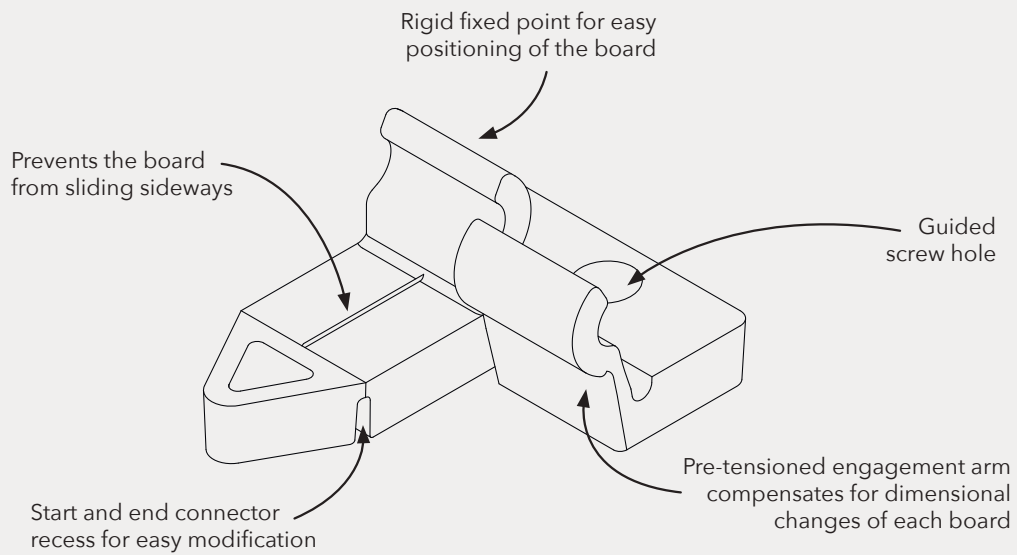




Lateral groove



Pre-tensioned connector



Partially visible screw connection for end and start boards

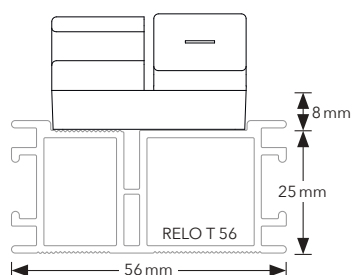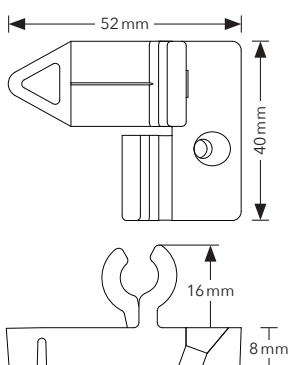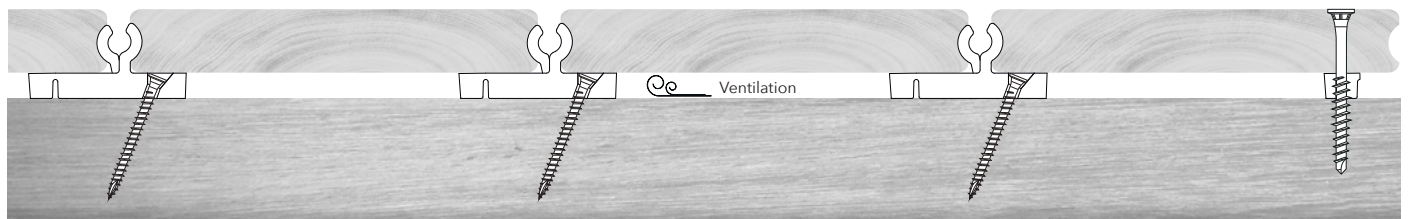

#### DOWNLOADS



Installation



Board exchange



Data sheet



Tips & Tricks



Configurator