

TRIGO

ADJUSTING WEDGE



TRIGO T50



TRIGO T23



TRIGO T14



The trigonal shape of the **TRIGO** adjusting wedges ensures quick and easy installation of decking substructures made of wood, wood-like materials or aluminium.

Three adjustment wedges can compensate for differences in height from 14 mm to 67 mm.

The design of the jagged teeth ensures a non-slip and deformation-free connection.

The special design and choice of materials have a sound absorption effect.

TRIGO adjustment wedges can be used universally and in any combination.

TRIGO

Description	PU	Prod. No.
Adjusting wedge T14	100 PAIR	012312001
Adjusting wedge T14 + T23	75 PAIR	012412001
Adjusting wedge T23	50 PAIR	012512001
Adjusting wedge T14 + T50	50 PAIR	034013000
Adjusting wedge T23 + T50	45 PAIR	034013001



BRANDING
Custom branding
upon request

DOWNLOADS



Data sheet



Tips & Tricks






Configurator

Compatible adjustment wedges allow a continuous height adjustment up to 67 mm

The special design ensures maximum load transfer without deformation

Jagged teeth ensure precise and non-slip alignment - even in the lateral direction

6 kN

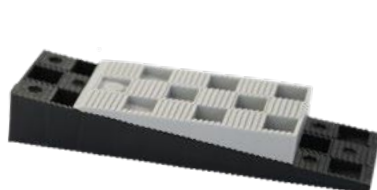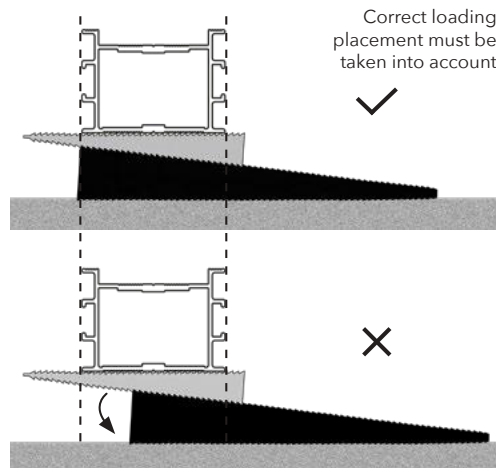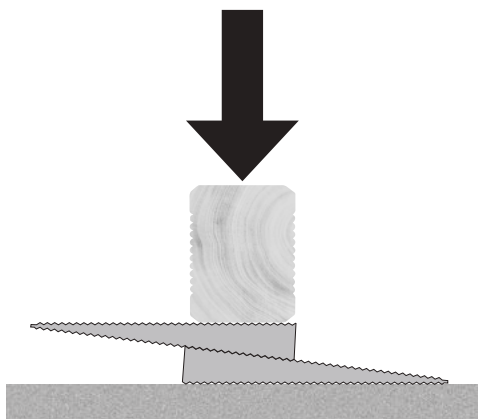

OVERVIEW	TRIGO T14	TRIGO T23	TRIGO T50
Height adjustment*	14 - 22 mm	2	
	18 - 32 mm	1	
	26 - 40 mm	2	
	39 - 58 mm	1	1
	41 - 67 mm	1	1
Dimensions:	H 3.5 - 14 mm W 46 mm L 93 mm	H 4 - 23 mm W 46 mm L 152 mm	H 31 - 50 mm W 46 mm L 152 mm
Material:	PE polyethylene UV and weather resistant		

* The stated height adjustments are determined with a 45 mm wide substructure