



PRODUCT DATASHEET

KONEKTO N® Decking connector

30.06.2023 This copy is not subject to the print or paper form



FIXINGGROUP GmbH



www.fixinggroup.com

office@fixinggroup.com

1. Unique identification code of the product type	KONEKTO N 8 - 9 Decking connector
	KONEKTO N 9.5 - 10.5 Decking connector
	KONEKTO N 11 - 12 Decking connector
2. Label for identification of the product	Type description: See product packaging
3. Intended purpose of use	Decking connector for side grooved boards
4. Manufacturer	FIXINGGROUP GmbH
5. Test method for evaluating and monitoring performance	Outdoor test area Thermally, chemically, and technically modified wood species, WPC, MPC, BPC
6. Harmonized standard - CE declaration of conformity mark	Not subject to declaration of conformity
7. Declared performance	Monitoring of the test areas Measuring points 1 - 20 Determination of limit values and deformation behaviour

General information	
1.1. Fastening type	Sliding point- sliding point This type of function is only suitable for decking boards with very high dimensional stability. Swelling and shrinking movements can be compensated for up to 4.0 mm per board.
1.2 Material	- POM polyoxymethylene UV and weather resistant - System screw UNIA Ø 4,8 mm - Revert to datasheet UNIA
1.3 Dimensions	According to the following illustrations

1.3 Decking connector Dimensions

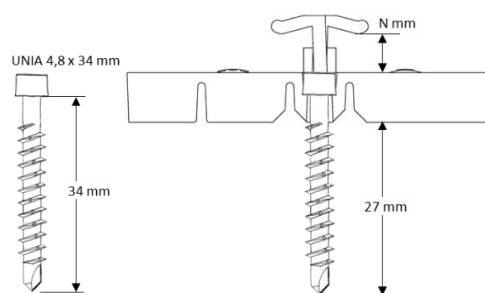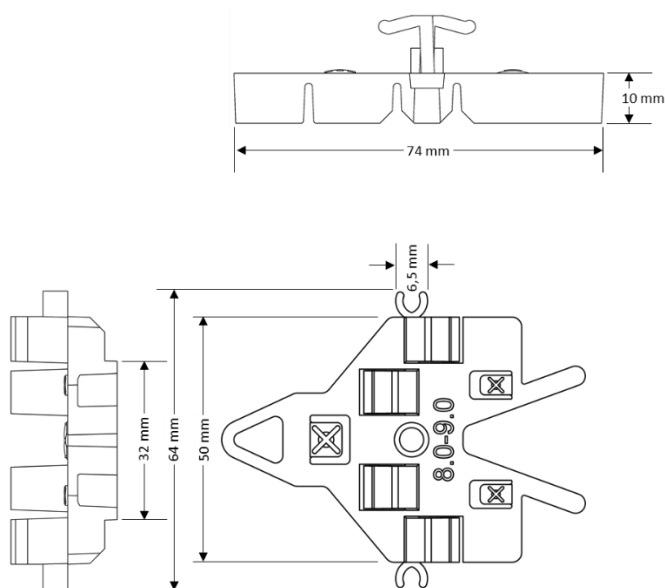

KONEKTO Type	N min.	N max.
N 8.0 - 9.0	7,8	9,2
N 9.5 - 10.5	9,3	10,7
N 11 - 12	10,8	12,2



PRODUCT DATASHEET

KONEKTO N® Decking connector

30.06.2023 This copy is not subject to the print or paper form




FIXINGGROUP GmbH

www.fixinggroup.com

office@fixinggroup.com


1.3 Decking side groove dimensions



The groove depth must be sufficient to ensure that any swelling effects of the decking boards do not cause the back of the groove to touch the engagement arms.

KONEKTO N 8.0 - 9.0	
KONEKTO N 9.5 - 10.5	
KONEKTO N 11 - 12	

1.3 Substructure dimensions

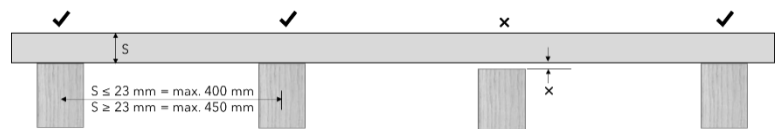

TORSION-RESISTANT SUBSTRUCTURE:




Substructure counter-batten or frame construction

BUTT JOINT DESIGN:



Longitudinal expansion must be considered

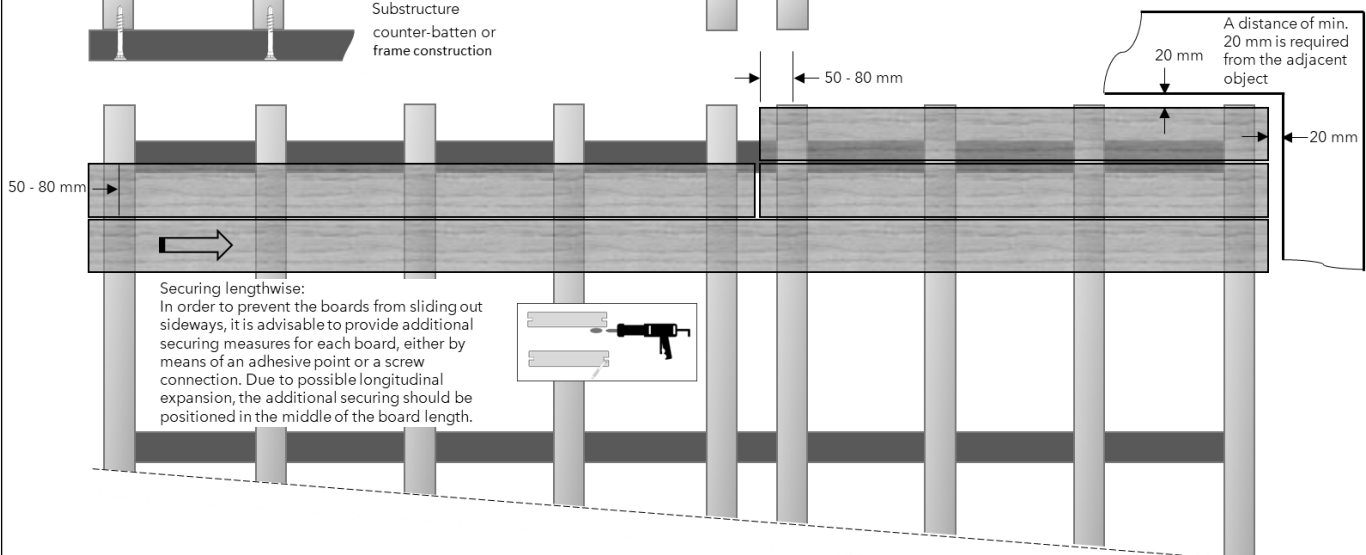



PRODUCT DATASHEET

KONEKTO N® Decking connector

30.06.2023 This copy is not subject to the print or paper form




FIXINGGROUP GmbH

www.fixinggroup.com


office@fixinggroup.com

7. Performance

Monitoring 13 wood species - 20 measuring points per test area

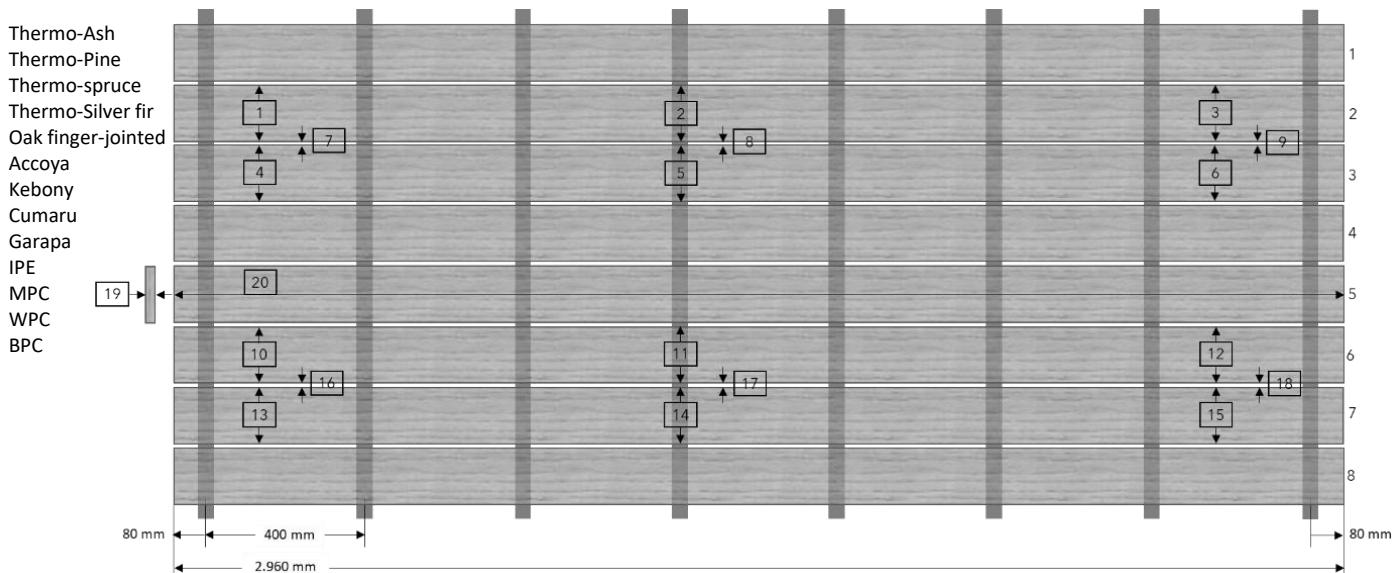

7. Performance - requirements for decking in special import hardwoods

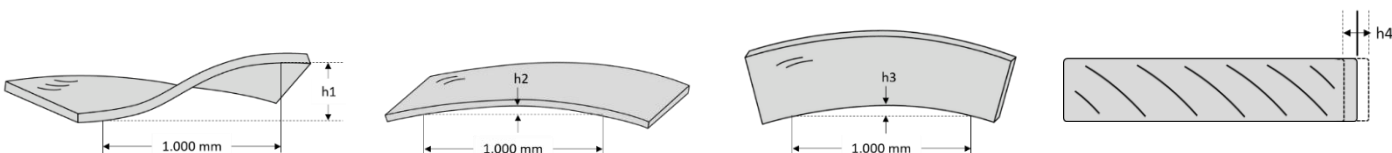

1. Twisting h1	Board width ≤ 100 mm h1 = max. 1,0 mm per 1.000 mm
	Board width ≤ 125 mm h1 = max. 1,25 mm per 1.000 mm
	Board width ≤ 145 mm h1 = max. 1,45 mm per 1.000 mm
2. Longitudinal bowing in the direction of the thickness h2	h2 = max. 2,0 mm per 1.000 mm
3. Longitudinal crook in the direction of the width h3	h3 = max. 2,0 mm per 1.000 mm
4. Swelling and shrinking allowance h4	h4 = max. + 4 mm / - 4,0 mm per Board width

FOR INTERNAL USE ONLY

All information is based on our current knowledge and experience - no guarantee can be derived from our information.

The suitability of the product for a specific application can only be guaranteed by our own tests and trials. The installation is according to the manufacturer's specifications, tips and tricks, installation instructions, technical rules, guidelines and country-specific regulations. If necessary, the compatibility of the decking connectors with the decking boards must be checked with the board manufacturer/supplier. The correct processing and installation of our products is beyond our control and therefore not our responsibility. We reserve the right to make errors, changes to the product range and technical modifications.