



PRODUCT DATASHEET



LIFTO F® ADJUSTABLE PEDESTAL







01.10.2025 This copy is not subject to the print or paper form



FIXINGGROUP GmbH
www.fixinggroup.com
office@fixinggroup.com

1. Unique identification code of the product type	LIFTO F ADJUSTABLE PEDESTAL VERSIONS: FU FK FS
2. Label for identification of the product	Type description: See product packaging
3. Intended purpose of use	levelling of height differences in terrace construction
4. Manufacturer	FIXINGGROUP GmbH
5. Test method for evaluating and monitoring performance	Loading tests Determination of limit values and deformation behaviour
6. Harmonized standard - CE declaration of conformity mark	Not subject to declaration of conformity
7. Declared performance	According to the table below

General information	
1.1 Material	PP Polypropylene Recycled compound in black Application for exterior terrace construction purposes - enhanced frost and heat resistance
1.3 Dimensions	According to the following illustrations
1.4 Loading tests The limit values are determined in the load direction of compression. The mechanical properties of the load-bearing capacity and the deformation behaviour were determined by a series of tests. Feed speed 4.00 mm/min	 

 LIFTO FU	 LIFTO FK	 LIFTO FSD	 LIFTO FS	 18 - 25 mm	 25 - 40 mm	 40 - 80 mm	 80 - 120 mm	 80 - 200 mm	 LIFTO FA 120	 Adapter + 120 mm	 Adapter + 120 mm	 Adapter + 120 mm	 Adapter + 120 mm	 Adapter + 120 mm
---	---	--	---	---	---	---	--	--	--	--	--	---	---	---

FSD: Shock-Absorbing Pad
110 x 3 mm easy to cut to size
EPDM granulate for impact
sound insulation



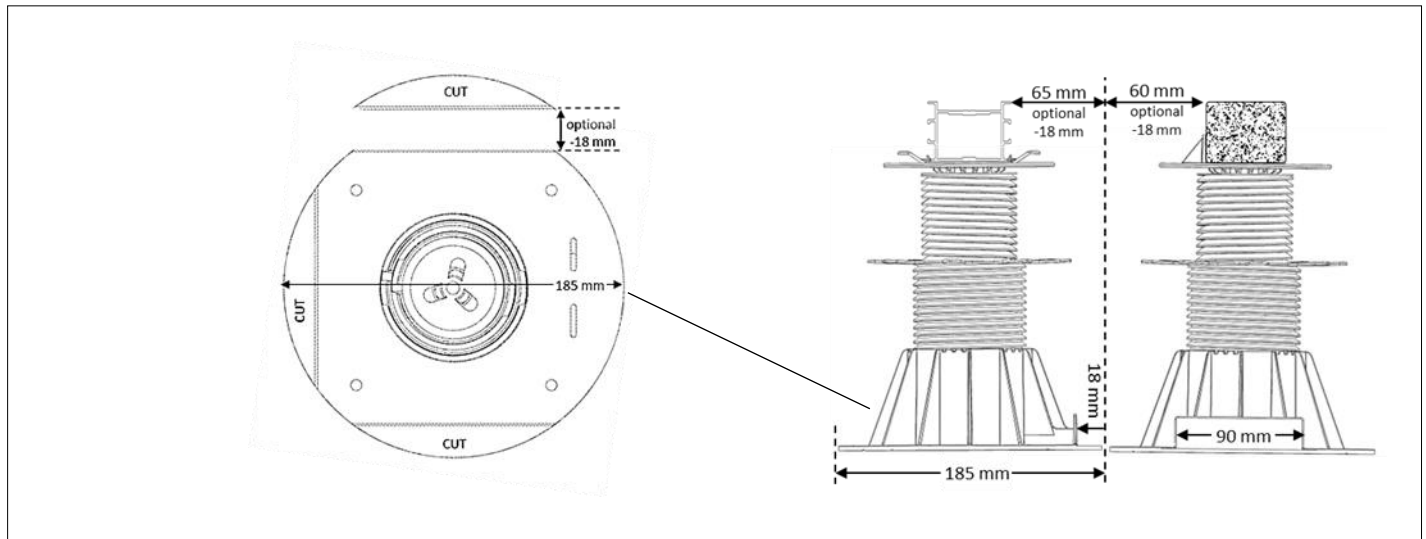
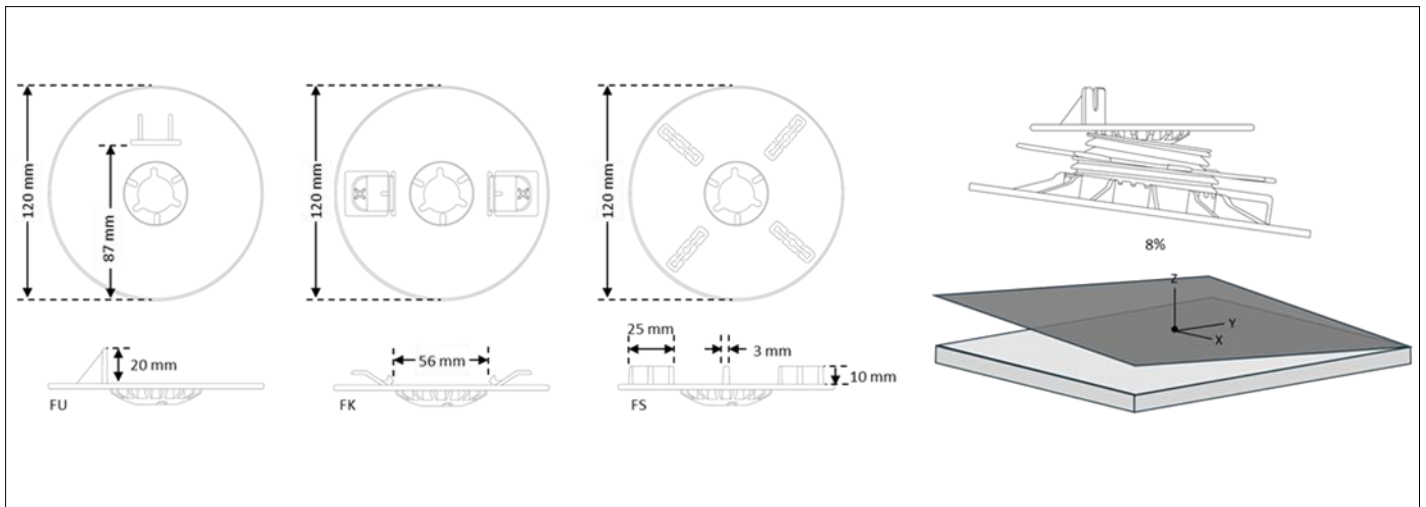
PRODUCT DATASHEET

LIFTO F® ADJUSTABLE PEDESTAL


01.10.2025 This copy is not subject to the print or paper form



FIXINGGROUP GmbH
www.fixinggroup.com
office@fixinggroup.com



LIFTO F Loading tests		Pessure loading					
F Force [kN] S Def. [mm]		F	S	F	S	Fmax. [at minimum height]	
adjustment range Test at maximum height	18 - 25 mm	2,3	4	4,4	6	35,0	18 mm
	25 - 40 mm	4,4	4	6,8	6	37,1	25 mm
	40 - 80 mm	4,2	4	6,7	6	38,0	40 mm
	80 - 120 mm	4,1	4	6,5	6	34,9	80 mm
	80 - 200 mm	4,0	4	6,0	6	34,9	80 mm
	200 - 320 mm	2,7	4	5,5	8	11,2	200 mm
	320 - 440 mm	2,5	4	5,9	8	6,7	320 mm
1 kN ≈ 100 kg 200 - 320 mm = LIFTO F 80 - 200 mm + 1 Adapter A120 320 - 440 mm = LIFTO F 80 - 200 mm + 2 Adapter A120							



FOR INTERNAL USE ONLY

All statements are based on our current knowledge and experience - no guarantee can be derived from our statements.

The suitability of the product for a specific application can only be guaranteed by our own tests and trials. Installation is in accordance with the manufacturer's specifications, Tips and tricks, installation instructions, technical rules, guidelines and country-specific regulations. The correct processing and installation of our products is beyond our control and therefore not our responsibility. Errors, modifications of the product range and technical changes are reserved.