


RELO KS

CLICK-ON TILE SUPPORT

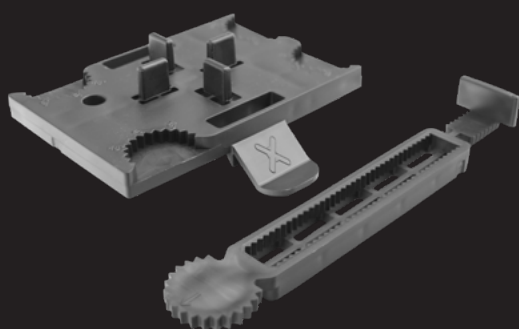

The **RELO KS** Click-on Tile Support enables terrace ceramic tiles to be installed on RELO aluminium substructures quickly, easily and efficiently.

The system allows even complex terrace and balcony layouts to be installed, regardless of the tile format or laying pattern. Installation heights of 38 to 539 mm, measured from the underside of the terrace slab, are possible.

The Click-on Tile Support creates a consistent 3 mm joint width and features multiple quick-fit mounting points for the adjustable side stop supplied with the system. This allows the outer rows of tiles to be positioned and securely fixed.

The 3 mm thick cushioning pad supplied with each Click-on Tile Support provides impact sound insulation and helps compensate for production tolerances in the terrace tiles.

Side fascia with terrace tiles can be installed quickly and easily using the RELO RA edge finishing trim profile.

The RELO V ventilation and drainage grate can either be integrated into the terrace surface or used as a side fascia solution.

RELO KS Click-on Tile Support SET

Description	PU	Prod. No.
RELO KS	30 PCS	034411000
RELO KS	90 PCS	034413000



BRANDING
Custom branding
upon request



SET-PACK
Each Click-on Tile support is supplied with
one cushioning pad, one side stop, one UNIA 4.2x17 mm
screw for positional fixing, and one installation manual

DOWNLOADS



Video



Installation




Data Sheet




Tips & Tricks



Configurator

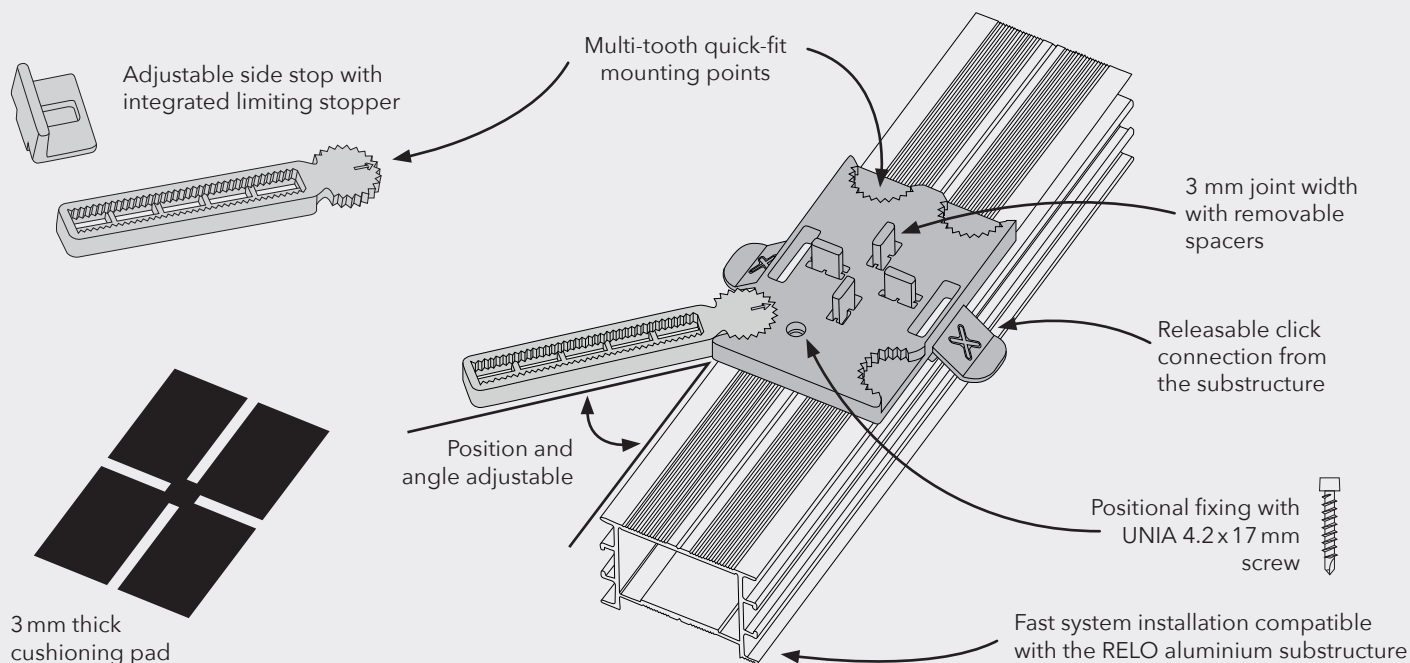

The integrated quick-fit mounting points for the side stop enable the outer rows of slabs to be positioned and secured quickly and easily.

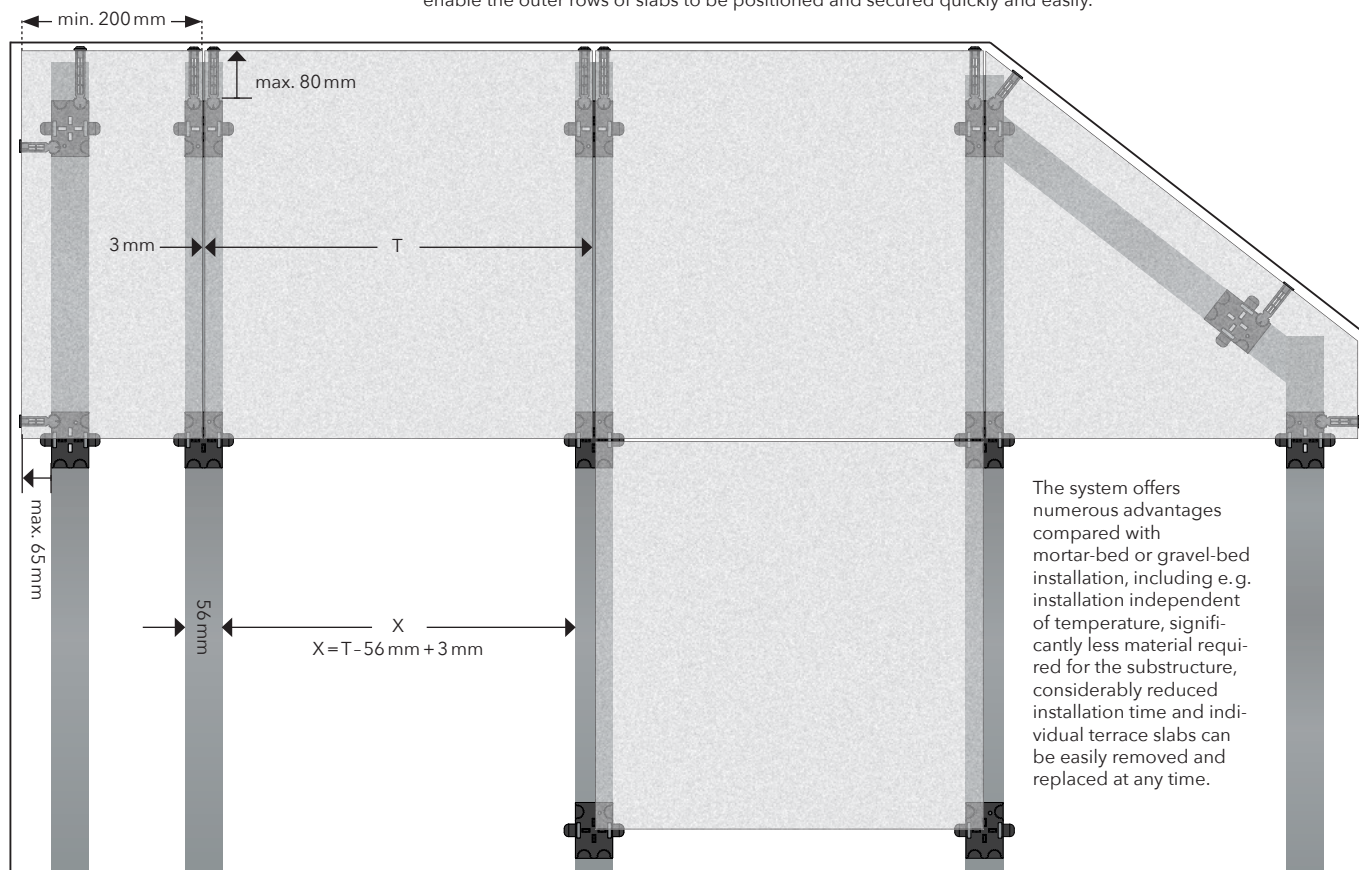

The RELO aluminium substructure can be installed as a floating structure, frame construction or counter-batten construction.

OVERVIEW	Click-on Tile Support	Side Stop	Cushioning Pad
Dimensions:	60x90 mm Height 8 mm Joint width 3 mm	Usable length up to 80 mm Width 15 mm	60x90 mm Height 3 mm
Material:	PP Polypropylene, black UV and weather resistant		EPDM granulate, black UV and weather resistant
Fixing Method:	Click connection		
Substructure:	Compatible with RELO C56, W56, N56 und T56		
Accessories:	RELO RA edge finishing trim profile RELO V ventilation and drainage grate		

