

TERA

FENCE AND PRIVACY SCREEN HARDWARE AND FITTINGS



Introducing the **TERA** fencing and privacy screen kit, designed for effortless customization of fences, wind or privacy screen elements.

With the TERA PA **Post Connection Profile**, achieve a seamless transition from fence infill to post, enhancing the overall aesthetic appeal.


Simply insert fence infills, such as rhombus mouldings or smooth-edged boards, into the post connection profile and secure them in place. The generously sized mounting covers effectively mask any cut edges or length differences.

For rhombus-shaped fence infills, integrate different-sized joint spacers (FUGO 5 | 8 | 12 mm) between infills for varying levels of opacity.

Ensure stability with the slimline TERA SP **Stability Profile**, fitted between posts to prevent twisting of fence panels.

Hide screw connections elegantly with the TERA AP **Finishing Trim**, adding to the system's visual appeal.

Complete the look with the TERA ASP **Top Cap Profile**, providing a flawless finish and additional structural protection for the top fence infill board. Extend the end profile effortlessly with the optional extension set as needed.



Visible Joint (S)			
	15° Rhombus	25° Rhombus	30° Rhombus
FUGO 5	≈ 5 mm	≈ 6 mm	≈ 7 mm
FUGO 8	≈ 9 mm	≈ 10 mm	≈ 11 mm
FUGO 12	≈ 13 mm	≈ 14 mm	≈ 15 mm

optional accessories

FUGO joint spacer (PU for one fence panel)			
Description	PU	Prod. No.	
FUGO 5	60 PCS	016003000	
FUGO 8	60 PCS	016103000	
FUGO 12	60 PCS	016203000	

TERA-SET (for one fence panel)		
Description	PU	Prod. No.
19-23 mm RAL 7016	1 SET	037300000
19-23 mm Anodised E6/EV1	1 SET	037200000
24-27 mm RAL 7016	1 SET	037500000
24-27 mm Anodised E6/EV1	1 SET	037400000



SET-PACK

For one fence panel H 1,800 x W 1,800 mm | 3.24 m²

2 Pcs. Post Connection Profile


10 Pcs. UNIA1 4.2x28 mm + 100 Pcs. UNIA1 4.2x17 or 22 mm

2 Pcs. Stability profile + 100 Pcs. UNIA1 4.2x17 or 22 mm

4 Pcs. Finishing trim

1 Pc. Top Cap Profile + 1 Pc. Installation manual

Post Connection Profile:
Sleek design for an elegant appearance

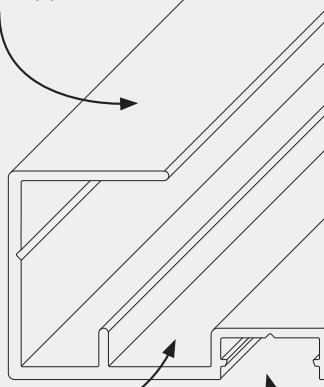


Insert Channel: Accommodates FUGO joint spacers seamlessly

Screw Channel: Equipped with an integrated V-groove screw guide for effortless installation

Finishing trim: Conceals screw channel for a clean finish



Stability Profile:
Slim design and ensures stability




Top Cap Profile:

Provides a finishing touch for the top of the fence or screen

E6 EV1
RAL 7016*

Surface Finish:
High-quality anodized or powder-coated surface

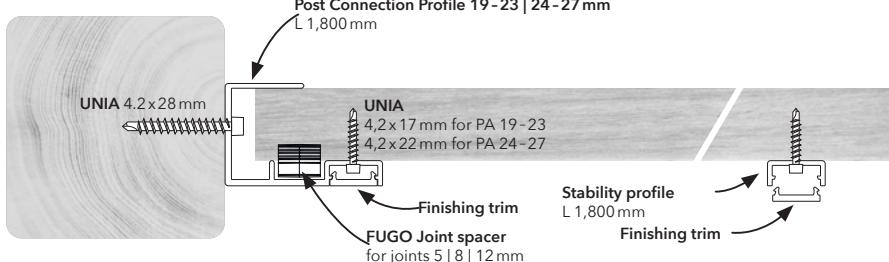

DOWNLOADS




Installation




Data Sheet




Video

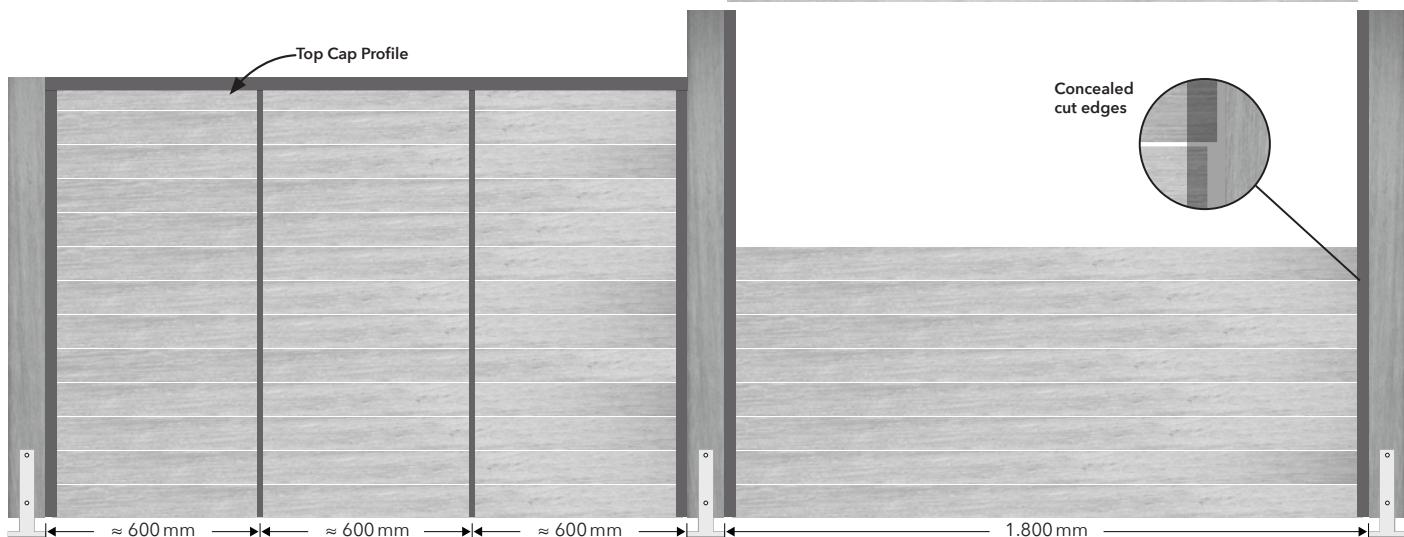

Concealed cut edges



Post Connection Profile PA 19-23 mm



Post Connection Profile PA 24-27 mm

OVERVIEW	TERA PA Post Connection Profile	TERA SP Stability Profile	TERA AP Finishing Trim	TERA ASP Top Cap Profile
Dimensions:	Length 1,800 mm PA 19-23 for fence infills from 19-23 mm PA 24-27 for fence infills from 24-27 mm	Length 1,800 mm Width 18 mm Height 8 mm	Length 1,800 mm Width 15 mm Height 4.5 mm	Length 1,800 mm for PA 19-23 for PA 24-27
Material:	Aluminium EN AW 6060			
Surface:	Silver anodised E6/EV1 or powder-coated RAL 7016*			
Accessories:	FUGO Joint spacer 5 8 12 mm for rhombus mouldings			Extension-set for fence widths over 1,800 mm

* Surface similar to RAL-Colour